

HEAVY DUTY SUPPLY CO., LTD.

142/10 MOO 5, SOI BANGLAMUNG 9, BANGLAMUNG,
CHONBURI 20150, THAILAND



PLEASE SCAN TO
OPEN IN MAPS

CONTACT US:

+66 61 435 5586 (ENG/GER)
+66 97 284 3647 (ENG/THA)
INFO@HDS-ASIA.COM
WWW.HDS-ASIA.COM




**TRAFFIC
SAFETY**



COMPANY PROFILE

HEAVY DUTY SUPPLY IS YOUR SPECIALIST & TRUSTED PARTNER FOR DESIGN, SUPPLY, INSTALLATION AND AFTER SALES SERVICE OF TRAFFIC SAFETY, IMPACT PROTECTION, INDUSTRIAL DOORS AND LOADING BAY EQUIPMENT. WITH OVER 10 YEARS INDUSTRY EXPERIENCE, WE ARE DEDICATED TO HELPING OUR CUSTOMERS PROTECT THEIR ASSETS AND INCREASE PRODUCTIVITY THROUGH OUR INNOVATIVE ONE-STOP-SERVICE SOLUTIONS.

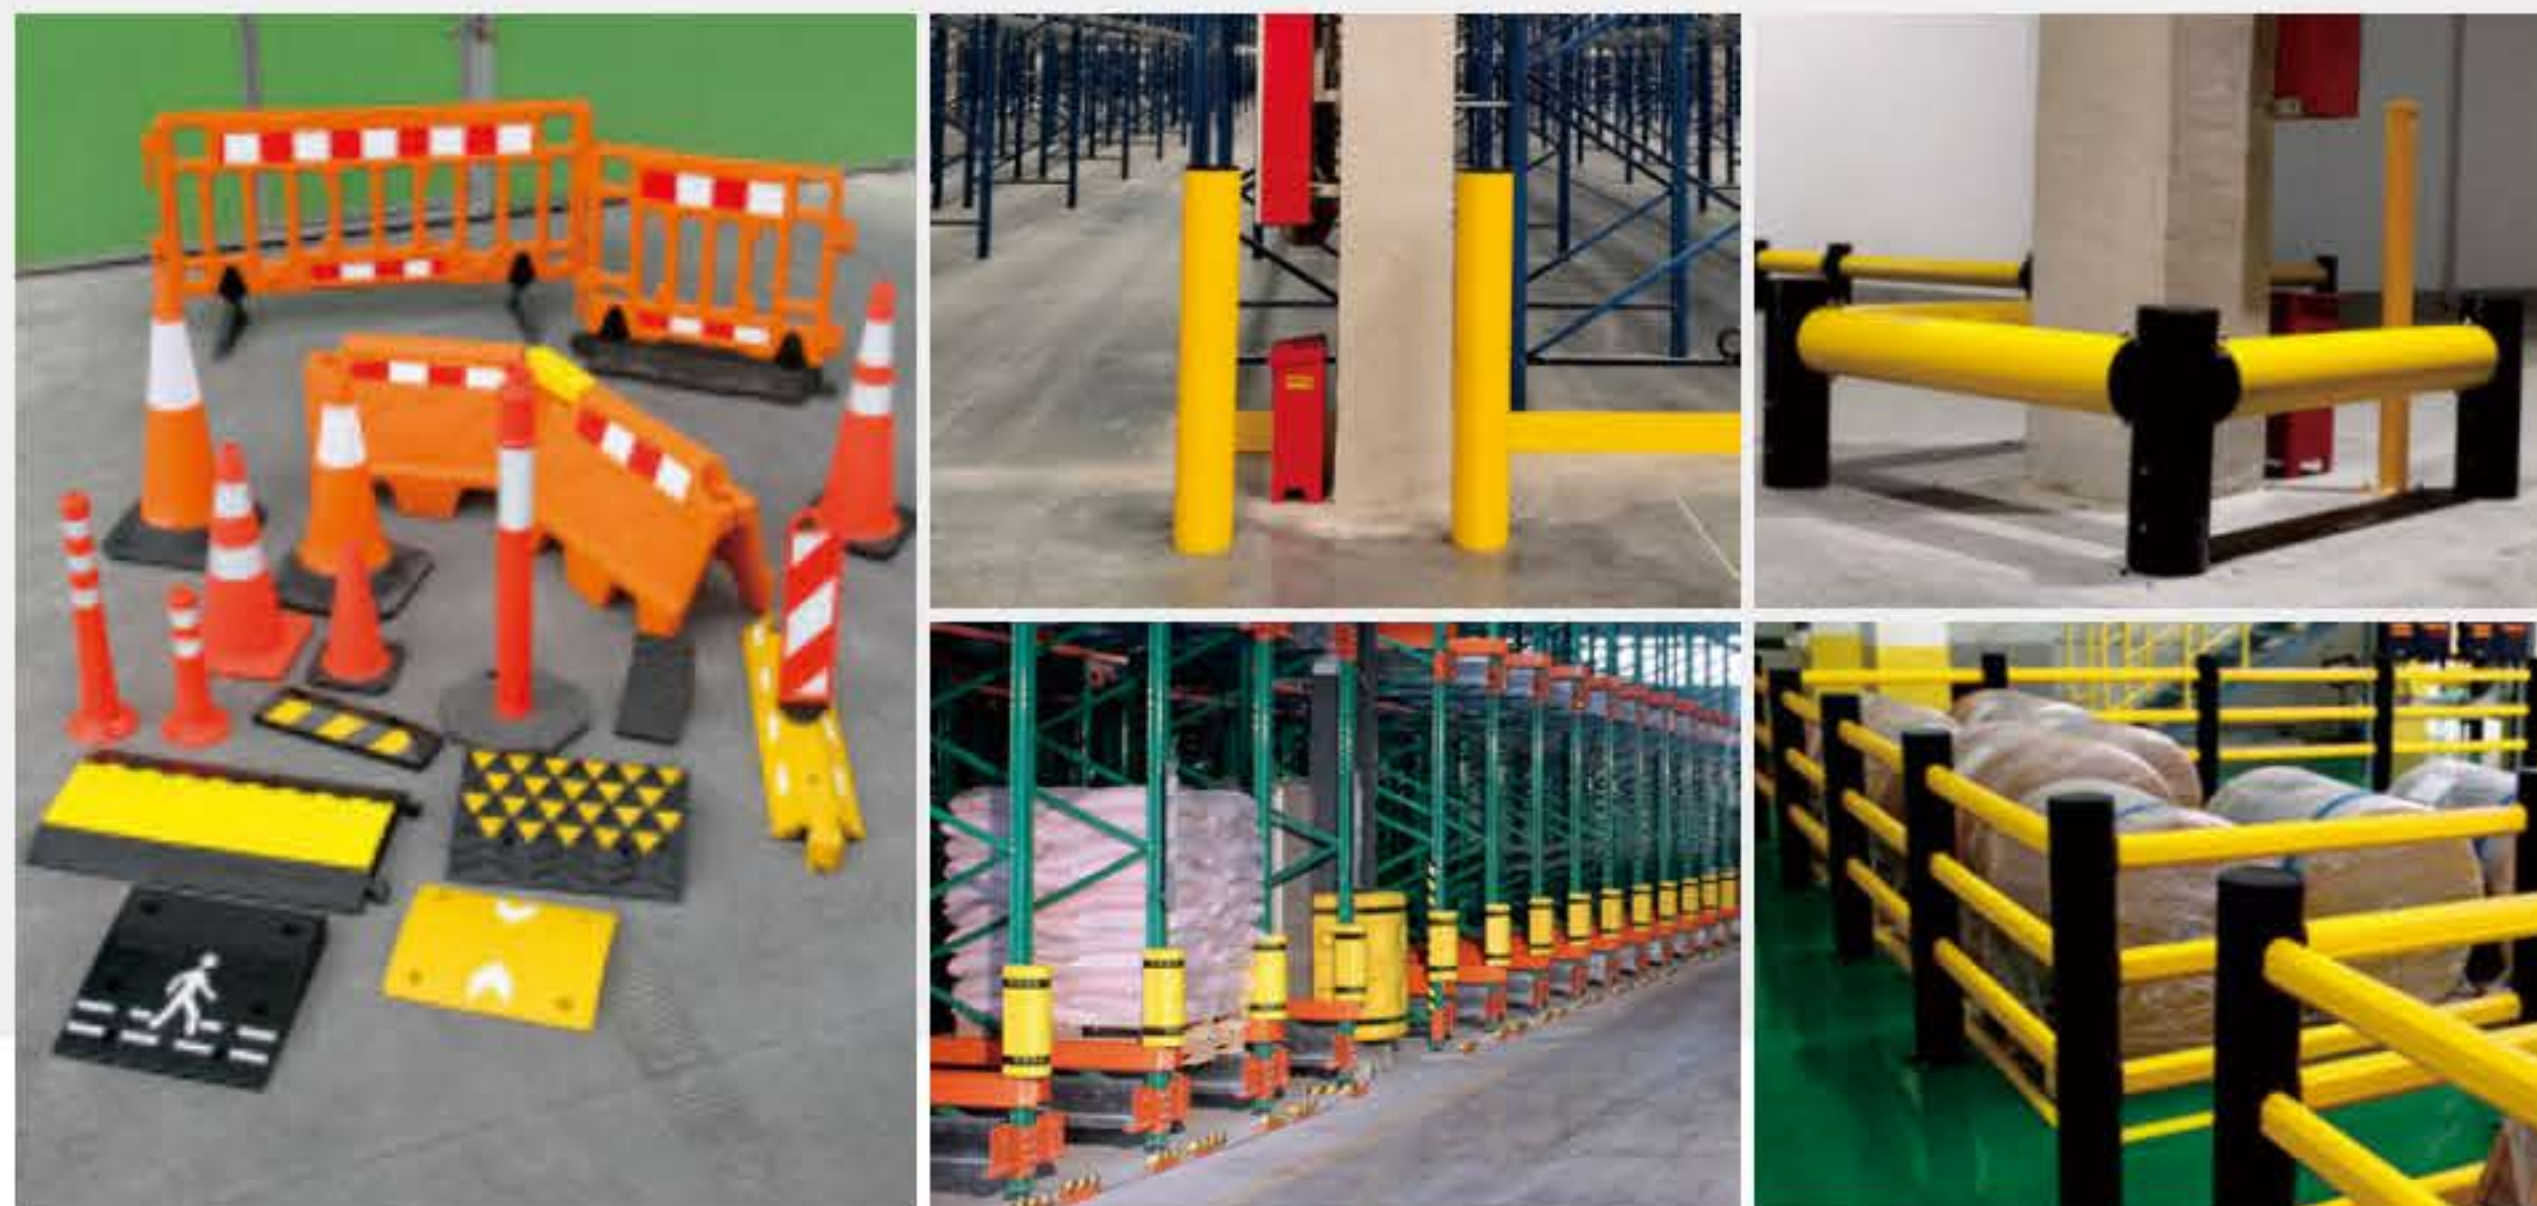

CONTENT

COMPANY PROFILE	P03-04
01 12 INCH & 18 INCH PVC TRAFFIC CONE	P05-06
02 28" SLIM & WIDE BODY PVC TRAFFIC CONE •	P07-08
03 36" SLIM & WIDE BODY PVC TRAFFIC CONE •	P09-10
04 EU PVC TRAFFIC CONE	P11-12
05 ECONOMICAL PE TRAFFIC CONE	P13-14
06 DELINEATOR BASE AND POST	P15-16
07 PARKING CURB	P17-18
08 AMERICA STYLE SPEED HUMP	P19-20
09 EUROPE STYLE SPEED BUMP	P21-22
10 DROP OVER CABLE COVER	P23-24
11 HEAVY-DUTY CABLE PROTECTOR	P25-28
12 LIGHT-DUTY CABLE PROTECTOR	P29-32
13 THRESHOLD RAMP	P33-34

D4956 for
Reflective Sheet



Hazardous Substance
Controlled

Testing According
to EN 13422



12 INCH & 18 INCH PVC TRAFFIC CONE



The PVC Traffic Cone could be twisted and pressed in 180 degrees. It could also reinstate when you make its top touch the floor, with high flexibility against the runover and impact of the cars. Because of good weather resistance, it won't deform in high temperature 65°C and craze in low temperature -30°C.

Highly reflective, good warning effects at both day and night, anti-UV, aging resistance and durable. This traffic cone has a wide body profile for stability. Drive for the road separating the role of the warning.

Model No	TH-TC-45N	TH-TC-30N
Body Style	Wide Body	Wide Body
Cone Height	45.5cm	30.5cm
Weight	1.4kg	0.8kg
Cone Material	PVC+Elastomer	PVC+Elastomer
Base Material	Recycle PVC	Recycle PVC
Base Dimension	37.0cm	20.9cm
Cone Dia.	15.2cm	11.4cm
Recessed Handle Top	Yes	Yes
Retroreflective Dimension	10cm / 15cm	10cm / 15cm
Retroreflective Collar	Type III or IV	Type III or IV
Standards	ASTM D4956 - 07, MUTCD	ASTM D4956 - 07, MUTCD

01 FLEXIBLE TRAFFIC CONE

28" SLIM & WIDE BODY PVC TRAFFIC CONE



Model No	TH-NTC-70SNL2	TH-NTC-70SN2	TH-NTC-70SNB2
Body Style	Slim Body	Slim Body	Slim Body
Cone Height	71.0cm	71.0cm	71.0cm
Weight	2.3kg	3.2kg	4.5kg
Base Dimension	37.0cm	37.0cm	37.0cm
Cone Dia.	20.8cm	20.8cm	20.8cm
Recessed Handle Top	Yes	Yes	Yes
Retroreflective Dimension	10+10cm / 15+10cm	10+10cm / 15+10cm	10+10cm / 15+10cm
Retroreflective Collar	Type III or IV	Type III or IV	Type III or IV
Standards	ASTM D4956-07, MUTCD	ASTM D4956-07, MUTCD	ASTM D4956-07, MUTCD



Model No	TH-NTC-70N	TH-NTC-70NB
Body Style	Wide Body	Wide Body
Cone Height	71.0cm	71.0cm
Weight	3.2kg	4.5kg
Base Dimension	37.0cm	37.0cm
Cone Dia.	27.9cm	27.9cm
Recessed Handle Top	Yes	Yes
Retroreflective Dimension	10+10cm / 15+10cm / 25cm	10+10cm / 15+10cm / 25cm
Retroreflective Collar	Type III or IV	Type III or IV
Standards	ASTM D4956 - 07, MUTCD	ASTM D4956 - 07, MUTCD

36" SLIM & WIDE BODY PVC TRAFFIC CONE



Model No	TH-NTC-90SNL2	TH-NTC-90SN2	TH-NTC-90SNB2
Body Style	Slim Body	Slim Body	Slim Body
Cone Height	91.0cm	91.0cm	91.0cm
Weight	4.0kg	4.5kg	5.4kg
Base Dimension	37.0cm	37.0cm	37.0cm
Cone Dia.	23.6cm	23.6cm	23.6cm
Recessed Handle Top	Yes	Yes	Yes
Retroreflective Dimension	15+10cm	15+10cm	15+10cm
Retroreflective Collar	Type III or IV	Type III or IV	Type III or IV
Standards	ASTM D4956-07, MUTCD	ASTM D4956-07, MUTCD	ASTM D4956-07, MUTCD



Model No	TH-NTC-90N	TH-NTC-90NB
Body Style	Wide Body	Wide Body
Cone Height	91.0cm	91.0cm
Weight	4.5kg	5.4kg
Base Dimension	37.0cm	37.0cm
Cone Dia.	28.0cm	28.0cm
Recessed Handle Top	Yes	Yes
Retroreflective Dimension	10+10cm / 15+10cm	10+10cm / 15+10cm
Retroreflective Collar	Type III or IV	Type III or IV
Standards	ASTM D4956 - 07, MUTCD	ASTM D4956 - 07, MUTCD

EU PVC TRAFFIC CONE

Comply with EN13422 Standard



Model No	TH-NTC-50N	TH-NTC-75N	TH-NTC-100N
Body Style	Wide Body	Wide Body	Wide Body
Cone Height	50.0cm	75.0cm	100.0cm
Weight	2.0kg	4.0kg	5.0kg
Base Dimension	30.0cm	40.0cm	50.0cm
Cone Dia.	25.0cm	25.0cm	25.0cm
Recessed Handle Top	Yes	Yes	Yes
Retroreflective Dimension	10+10cm	15+10cm	15+10cm
Retroreflective Collar	Class 2 or 3	Class 2 or 3	Class 2 or 3
Standards	EN 13422	EN 13422	EN 13422

ECONOMICAL PE TRAFFIC CONE

PE Traffic Cone, made of PE material and plastic black base with different height and weight, there are 45cm, 50cm, 70cm, 75cm, 90cm and 100cm for your choice. Base and cone can be locked together with special design, can be packed separately. The PE plastic traffic cone is easy to install and shipping.

Can be made of different colors and height, weight for your choice.

Interlocking design for cone and base, easy to install and shipping.

Can be fix the LED light on top of the cone.

More competitive price with good quality.



Model No	TH-BTC-50	TH-BTC-75	TH-BTC-100
Cone Height	50.0cm	75.0cm	100.0cm
Weight	1.4kg	4.0kg / 5.0kg	5.0kg / 7.5kg
Cone Color	Orange cone, black base	Orange cone, black base	Orange cone, black base
Cone Material	HDPE	HDPE	HDPE
Base Material	Rubber	Rubber	Rubber
Base Dimension	20.3cm	20.3cm	20.3cm
Outside Dia.	15.2cm	15.2cm	15.2cm
Recessed Handle Top	Yes	Yes	Yes
Retroreflective Collar	Reflex Jacket	Reflex Jacket	Reflex Jacket
Standards	EN13422	EN 13422	EN 13422

DELINEATOR BASE AND POST

Traffic bollard base is designed with easy grip handles, and stacking rings for easy storage and transportation.



Model No	TH-GC-Base-5	TH-GC-Base-6	TH-GC-Base-7
Inner Dia.	10.0cm	10.0cm	10.0cm
Weight	4.0kg	5.0kg	6.0kg
Base Dimension	45.0cm	45.0cm	45.0cm
Base Shape	Octagon	Octagon	Octagon
Base Material	Rubber / PVC	Rubber / PVC	Rubber / PVC

Highly visible traffic Delineator Post that increase driver and pedestrian safety. The recessed areas on the stem protect the reflective bands, minimizing rips and scratches.

At the intersection of cities, sidewalks, and the isolation between buildings, the driving motor vehicles play a warning role, and once hit, they will not cause a second injury.

- Extremely the flexible Delineator Post is high bright reflecting sheeting being used;
- Flexible warning post is High visible; good warning effect-Can reverse direction and catch drivers' eyes to pay attention to dangerous areas;
- The reflective and flexible warning post is very durable — be able to bear high pressure, folding and winding resistance. Even it was bended, it can return to original state;
- Delineator Post is Sunproof, water-proof, Weather resistant, colorfastness.



TH-GC-Post-1

TH-GC-Post-9

TH-GC-Post-12

TH-GC-Post-20

TH-GC-Post-21

Model No	Top Style	Height	Delineator Dia.	Weight	Delineator Material
TH-GC-Post-1	T-top	114.3cm	10.1cm	0.7kg	HDPE+Elastomer
TH-GC-Post-9	Grab-Top	114.3cm	10.1cm	0.7kg	HDPE+Elastomer
TH-GC-Post-12	Looper-Top	114.3cm	10.1cm	0.7kg	HDPE+Elastomer
TH-GC-Post-20	Π-Top	114.3cm	10.1cm	0.7kg	HDPE+Elastomer
TH-GC-Post-21	Round-Top	114.3cm	10.1cm	0.7kg	HDPE+Elastomer



07 PARKING SAFETY



PARKING CURB

For Car Paking Lot

Wheel Stops are fabricated from premium quality recycle rubber. They have high resistance to severe impact brutal weather conditions. They will help regulating the layout of your residential and parking lots. They can be installed onto the ground of the allotted/painted Parking Slots to prevent the car from going beyond its limited location thus to protect wall/glass glazing structures the car itself from damages.




Model No	Length	Height	Width	Weight	Number of Holes	Yellow Stripe
TH-PB-4	55.0cm	10.0cm	15.0cm	2.5kg	2	Pavement Mark Tape with Glass Beads
TH-PB-6N	165.0cm	10.0cm	16.0cm	12.0kg	3	
TH-PB-16	178.0cm	14.0cm	10.0cm	10.0kg	4	
TH-PB-2	183.0cm	10.0cm	15.0cm	13.0kg	4	



AMERICA STYLE SPEED HUMP

Rubber speed hump can be installed on the surface of asphalt roads and concrete roads. It is made of high quality rubber, the yellow part is brilliant and reflective to have drivers' attention, no mater at day or night.To improve life span, the road must be smooth. After drilling, clean Up the holes and remove the dust, oil and debris from the holes. Using the special adhesive, put the bottom of the bump to the surface of the road.

- Features:
1. Specialized designed, notable decelerate effect,without noise and uncomfortable feeling
 2. High quality rubber,firm and useful, good anti-impactability.
 3. Set up flexibly according to the request of the customer, convenient installment.
 4. Black and yellow, affect in day and night , attack the attention of the drivers to decelerate successfully
 5. Widely used , one of the newest traffic safe productions , a good helper of the manager.

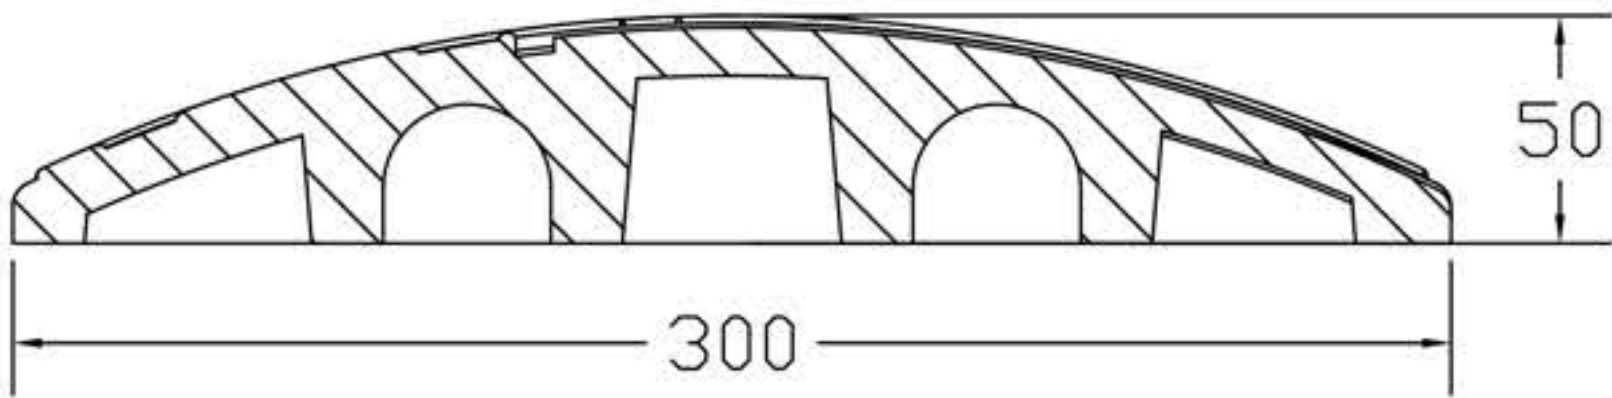


Model No	Length	Height	Width	Weight	Yellow Stripe	Number of Holes	Cable Channel Width	Cable Channel Height
TH-SP-26	183.0cm	5.0cm	30.0cm	20.0kg	EPDM Rubber Molded	4	3.5cm	2.5cm

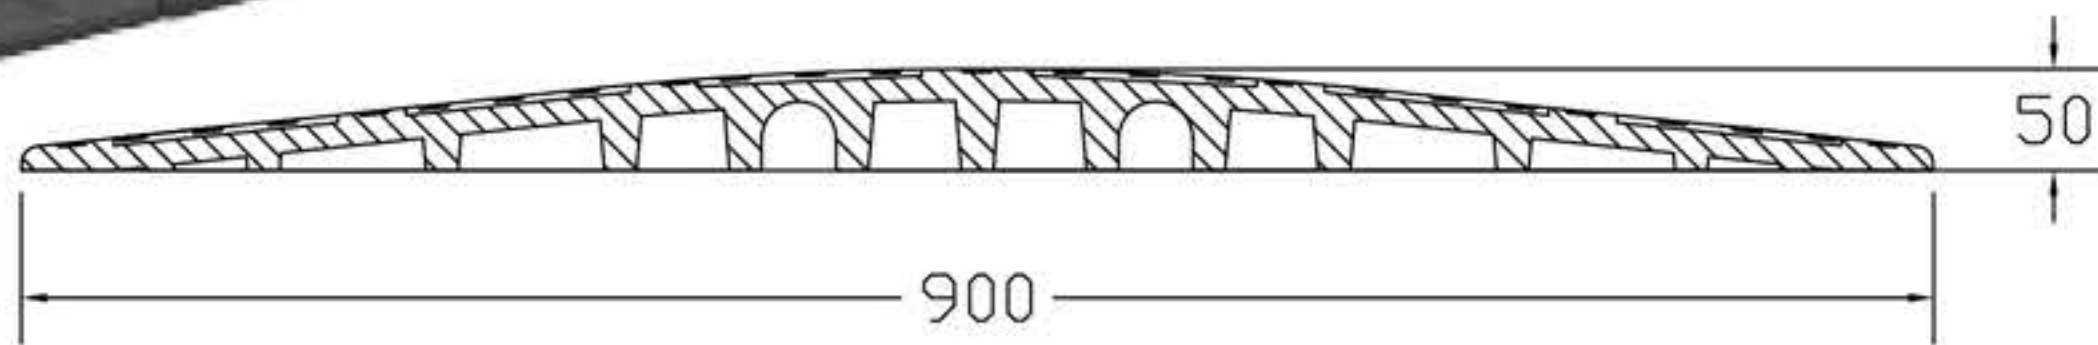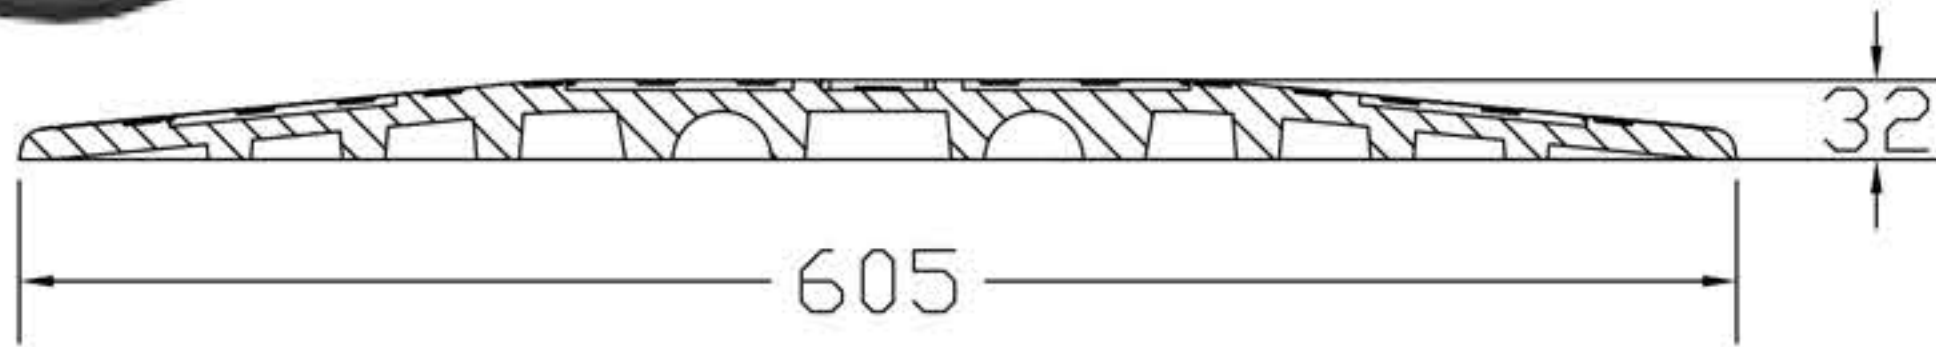


Model No	Length	Height	Width	Weight	Yellow Stripe	Number of Holes	Cable Channel Width	Cable Channel Height
TH-SP-21	50.0cm	3.0cm	60.0cm	9.0kg	EPDM Rubber Molded	4	3.5cm	2.5cm
TH-SP-22	50.0cm	5.0cm	90.0cm	15.0kg		4	No Channel	No Channel


EUROPE STYLE SPEED BUMP

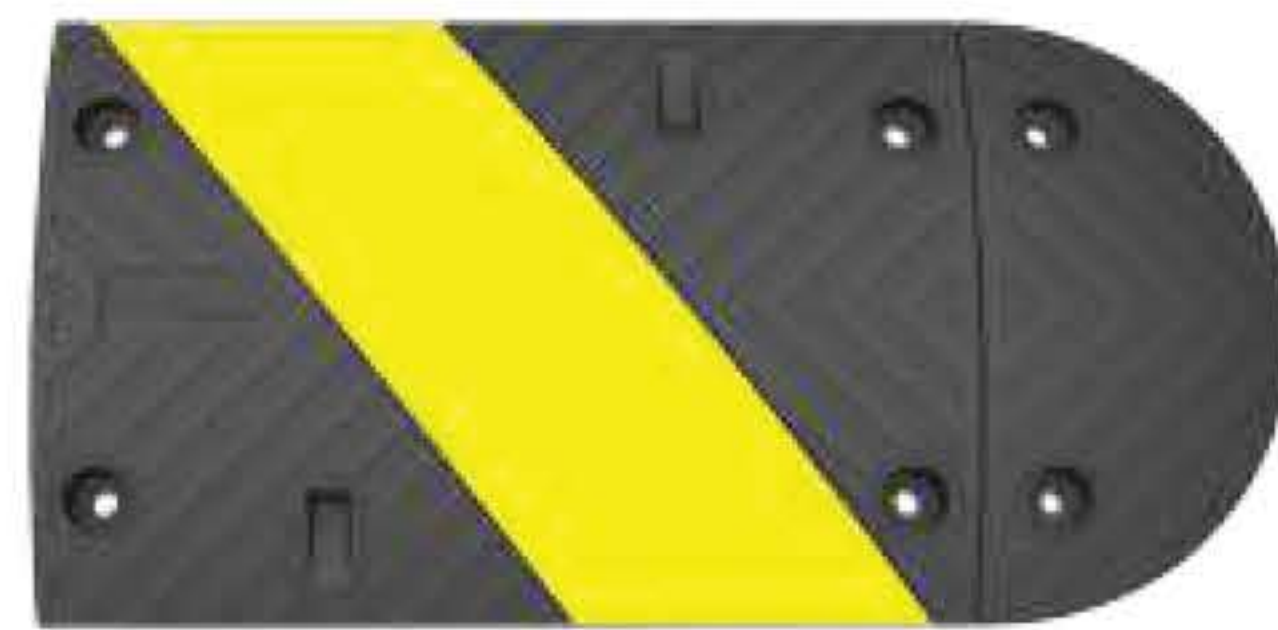

TH-SP-56

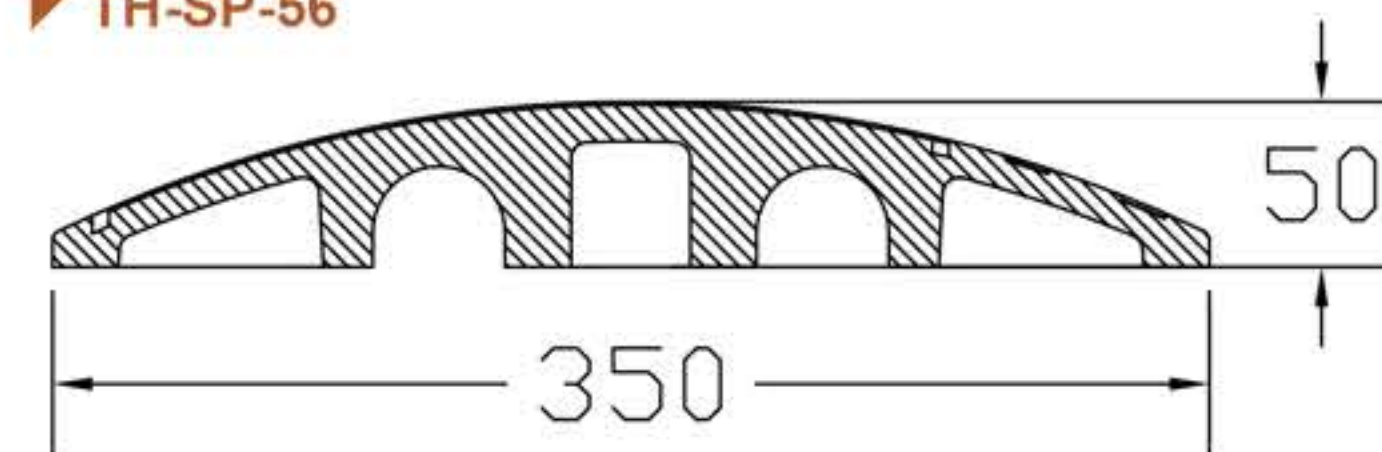


TH-SP-31

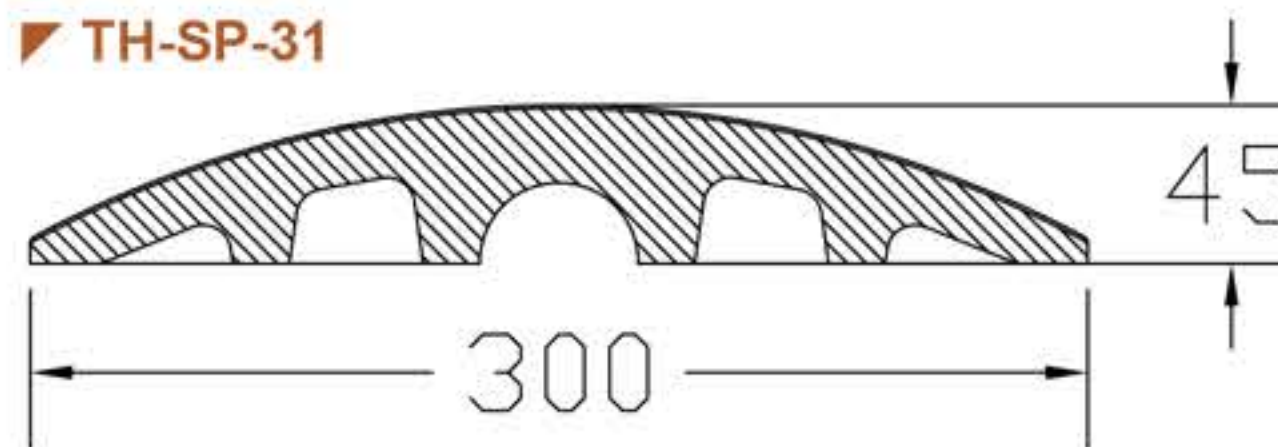


Model No	Length	Height	Width	Weight	Yellow Stripe	Number of Holes	Cable Channel Width	Cable Channel Height
TH-SP-56	50.0cm	5.0cm	35.0cm	7.0kg	EPDM Rubber Molded	4	4.5cm	2.5cm
TH-SP-57	50.0cm	5.0cm	32.0cm	6.0kg		4	4.5cm	2.5cm
TH-SP-31	50.0cm	4.5cm	30.0cm	5.0kg		4	4.5cm	2.5cm




TH-SP-57

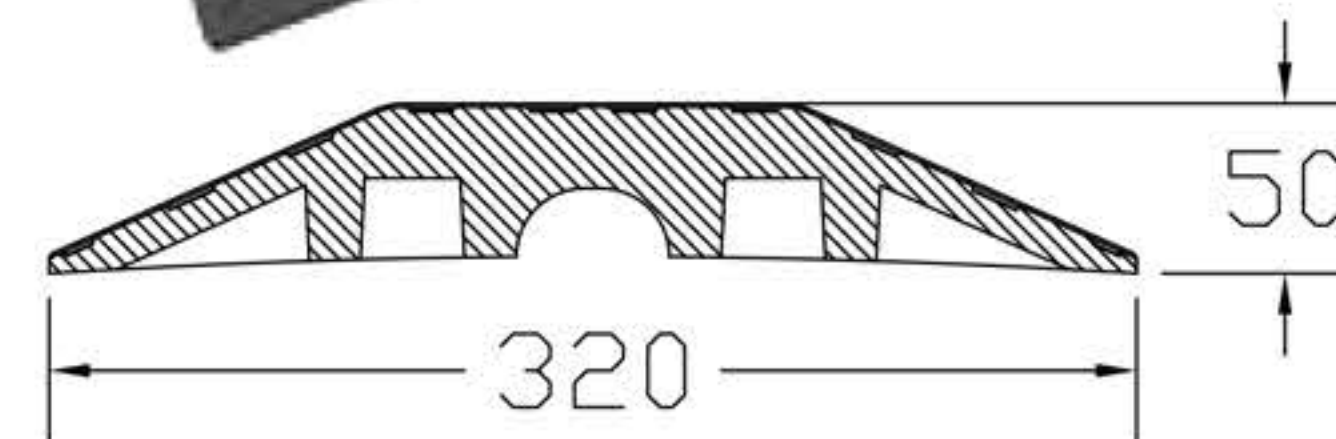


TH-SP-59

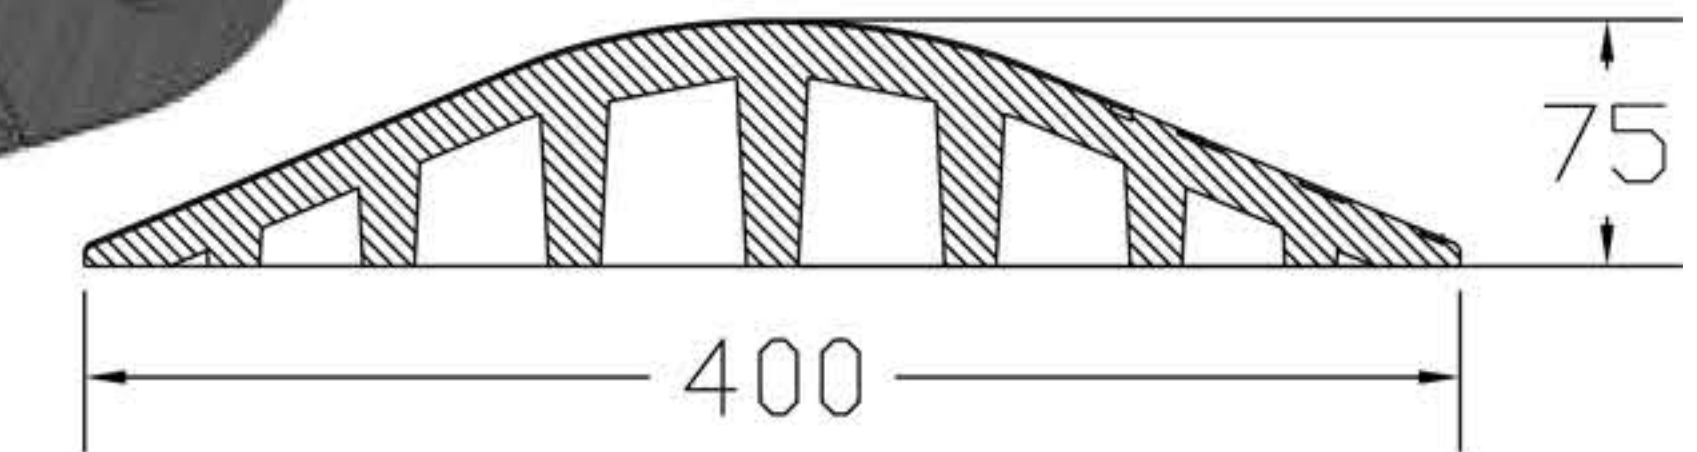

TH-SP-58

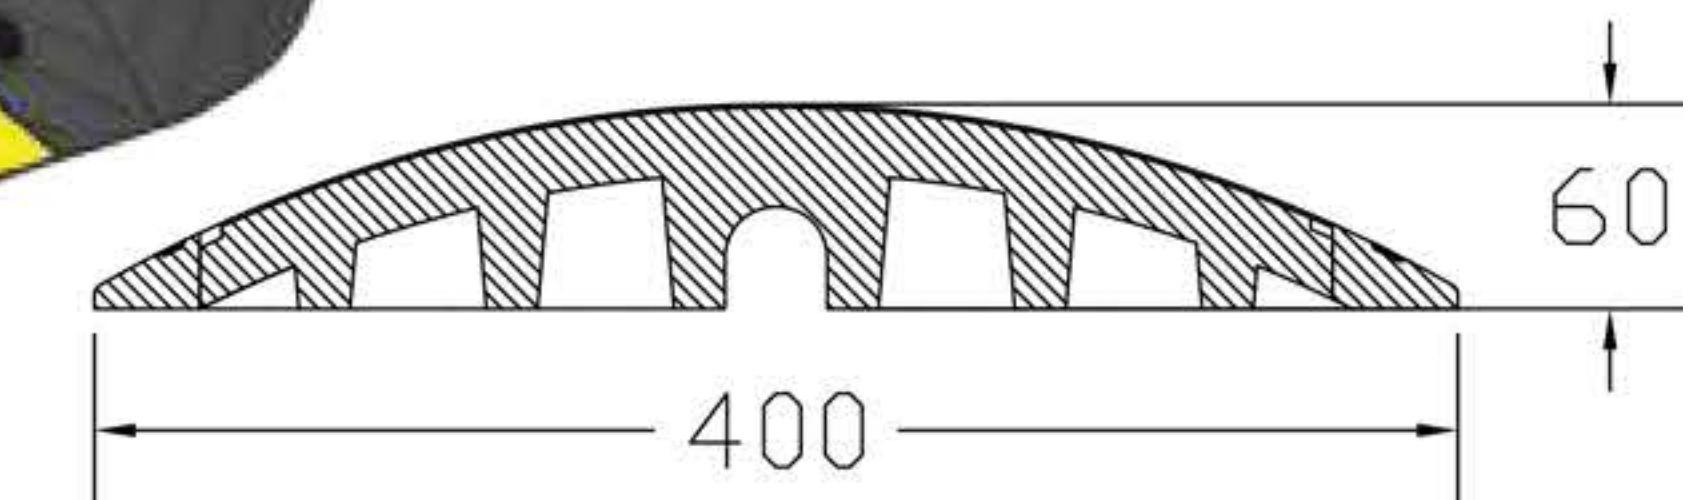

TH-SP-32

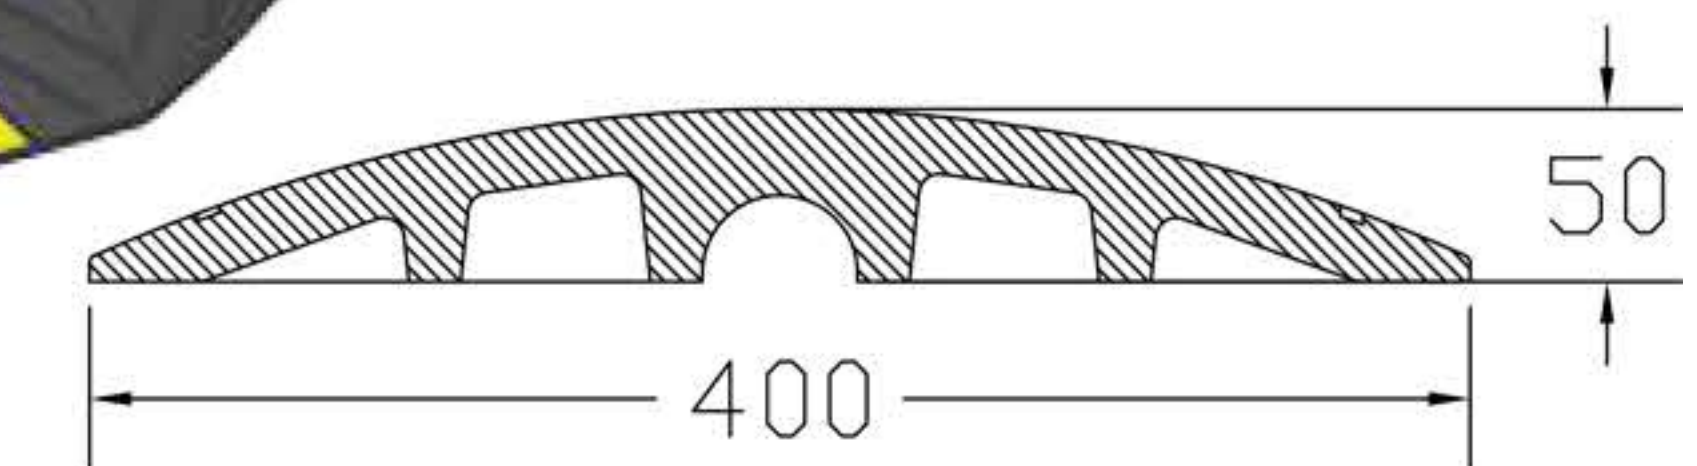

Model No	Length	Height	Width	Weight	Yellow Stripe	Number of Holes	Cable Channel Width	Cable Channel Height
TH-SP-59	50.0cm	7.5cm	40.0cm	12.0kg	EPDM Rubber Molded	4	4.5cm	2.5cm
TH-SP-58	50.0cm	6.0cm	40.0cm	9.0kg		4	4.5cm	2.5cm
TH-SP-32	50.0cm	5.0cm	40.0cm	8.0kg		4	3.5cm	2.5cm





10 CABLE PROTECTOR

DROP OVER CABLE COVER

Cable Cover system provides a fast and easy way to guard and protect valuable electrical cables and hose lines from damage and abuse while providing a method of safe crossing for constant vehicle and pedestrian traffic. Ideal for use in amusement parks, entertainment venues, sporting events, and in most public, commercial, industrial, construction, and utility applications.

Features

1. Made of Rubber, light weight and high strength.
2. Unique arched design can enhance the weight loading capacity.
3. Surface decorative pattern design, prevent slippery and novel.
4. Easy to operate.

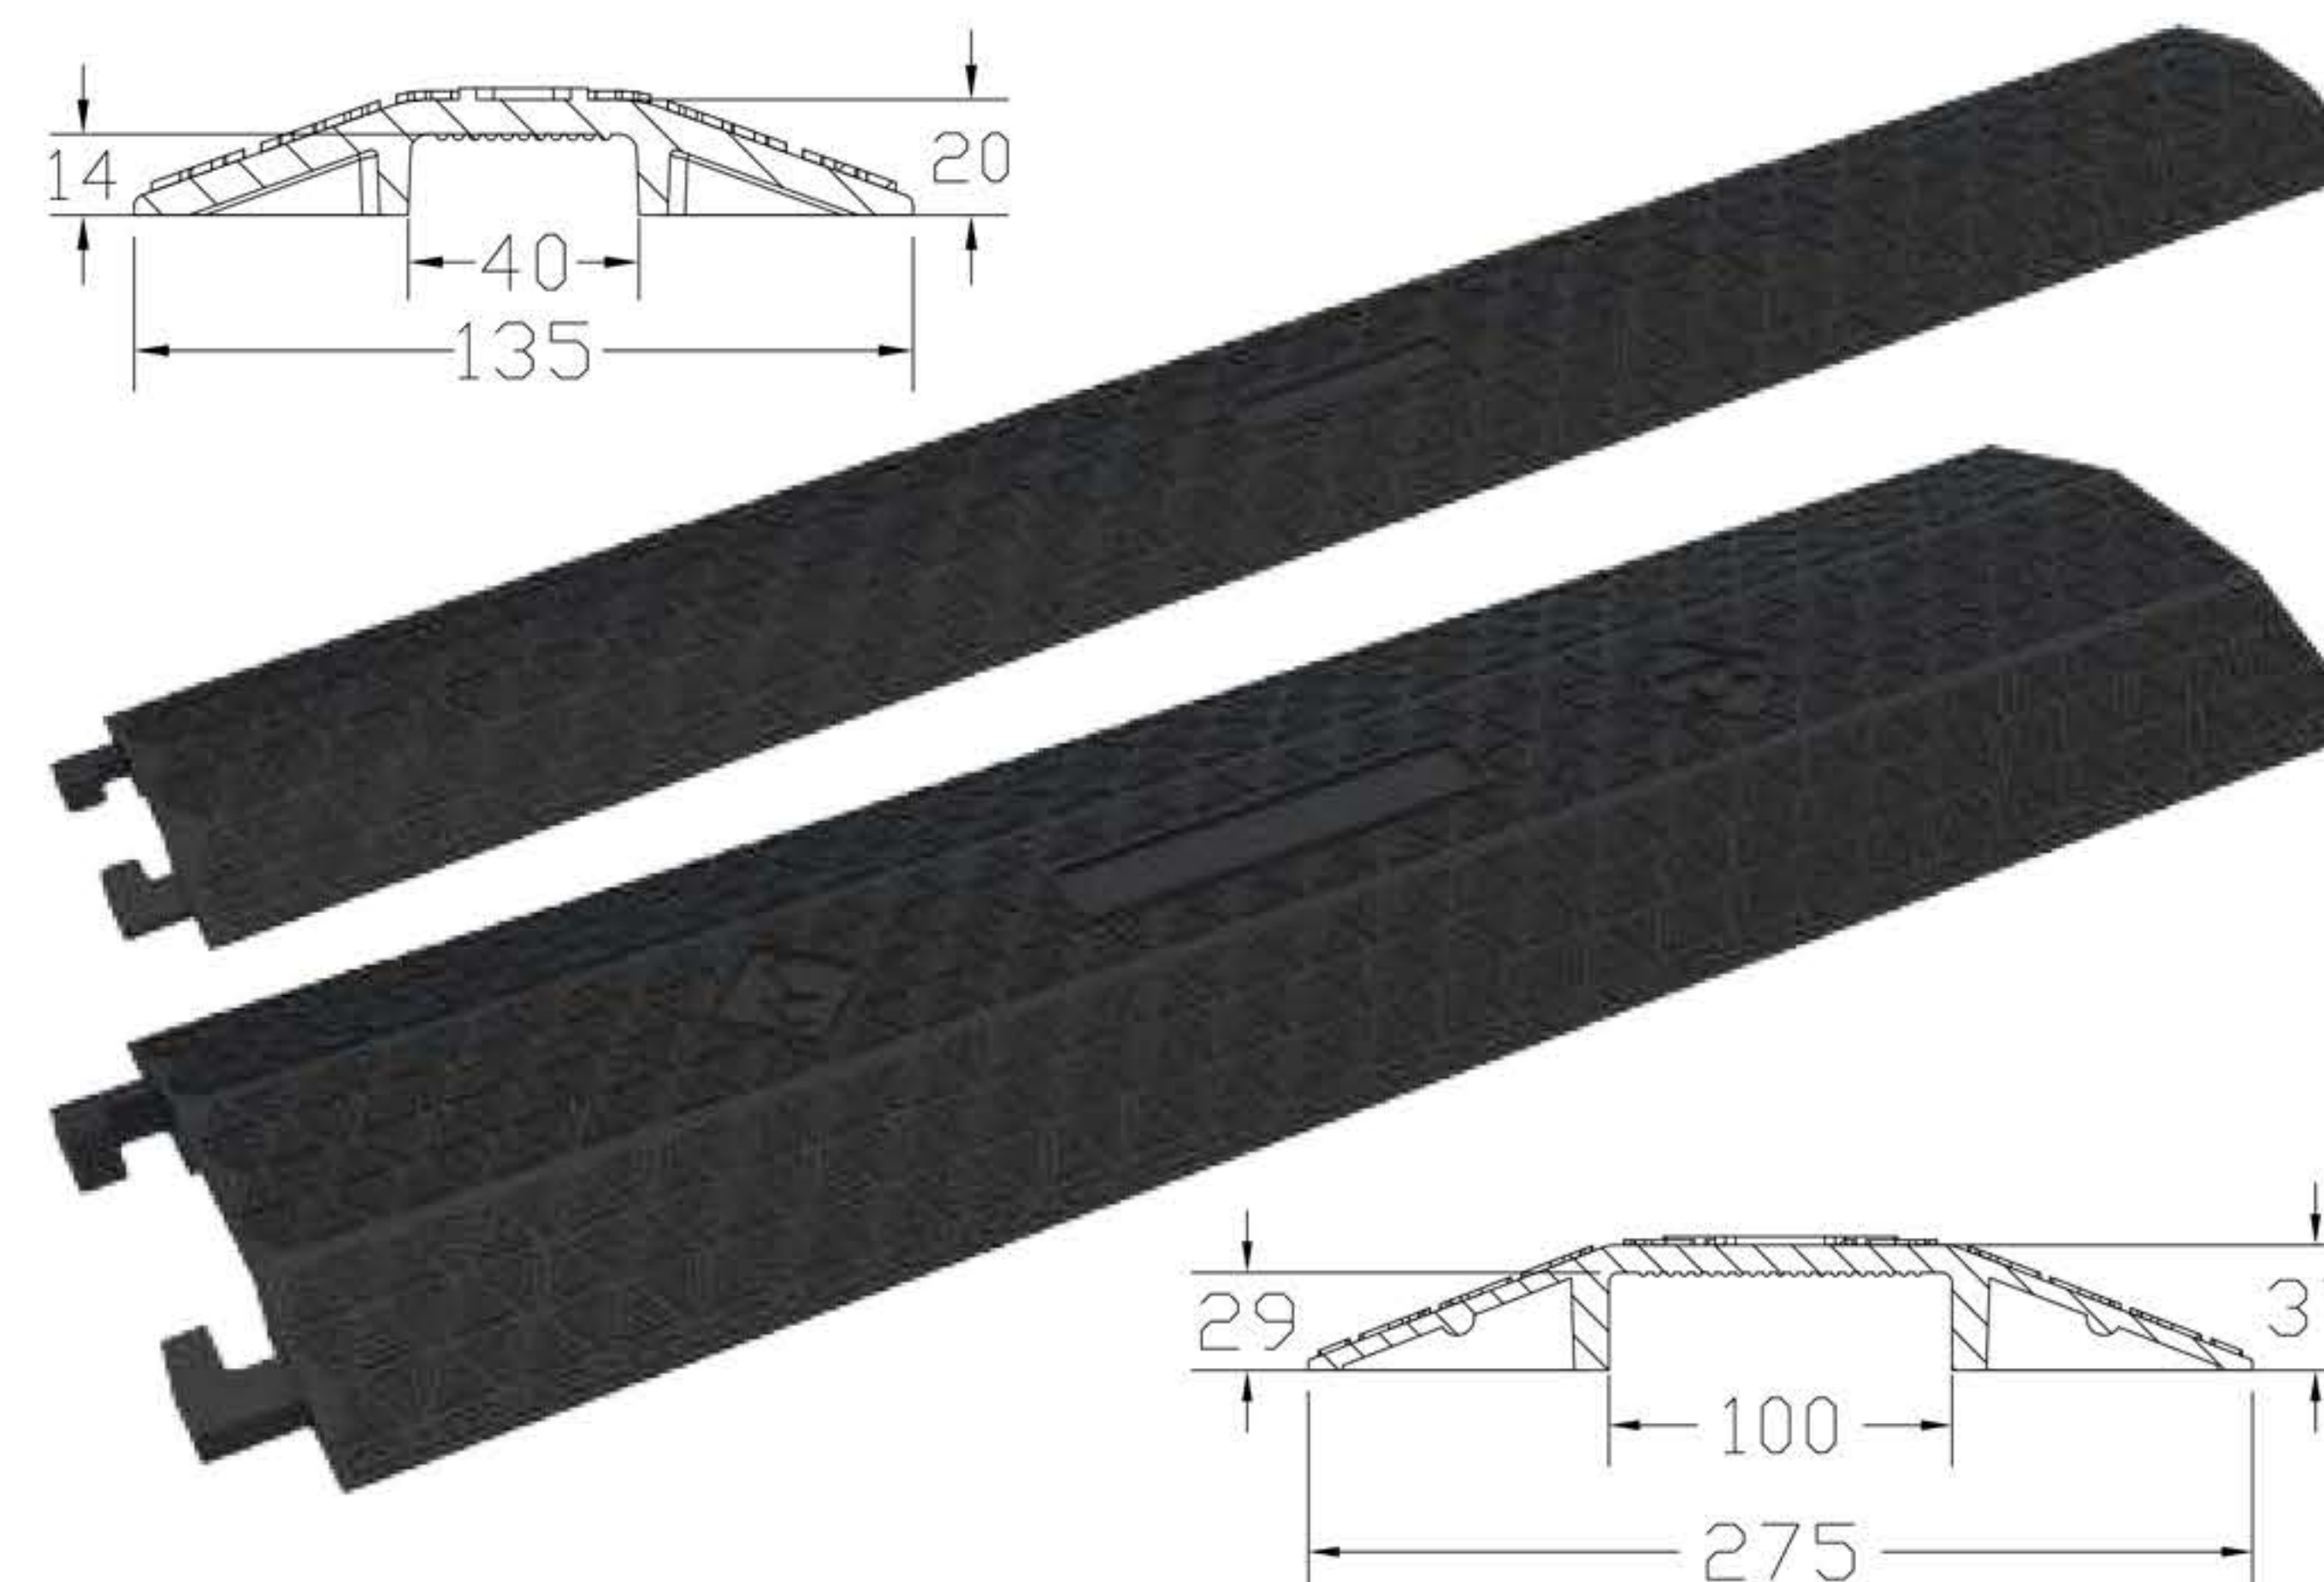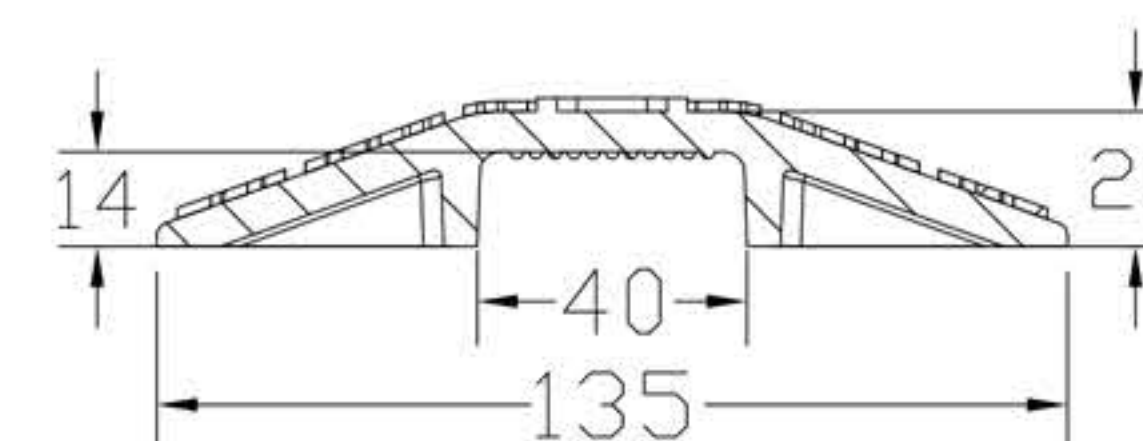


Model No	Length	Width	Height	Channel Width	Channel Height	Max.Cable Dia.	Load Capacity
DH-ECR-3	100.0cm	14.0cm	2.0cm	4.0cm	1.3cm	1.3cm	200.0kg
DH-ECR-4	100.0cm	27.0cm	3.8cm	8.0cm	2.0cm	2.0cm	200.0kg

HEAVY-DUTY CABLE PROTECTOR



These heavy duty cable protector have multiple channels for the protection of a large number of wires. Hinged lid allows for top loading of cables for convenience. Made of commercial grade rubber it is suitable for use outdoors and indoors in most weather conditions. The black body color with a yellow lid is highly visible. These units will protect your cables from vehicles of up to 18,000 pounds per axle. Due to the heavy nature of this cable protector, it tends to stay where you put it.

- Perfect solution for temporary events such as fairs, conventions, and trade shows;
- Safety warning symbols molded into lid surface, with universal safety colors for high visibility;
- Recessed Carrying Handle allows for moving with ease;
- Easy to interlock Highly visible color Non-conductive construction;
- Heavy duty Dog-Bone connector interlocks modular sections.

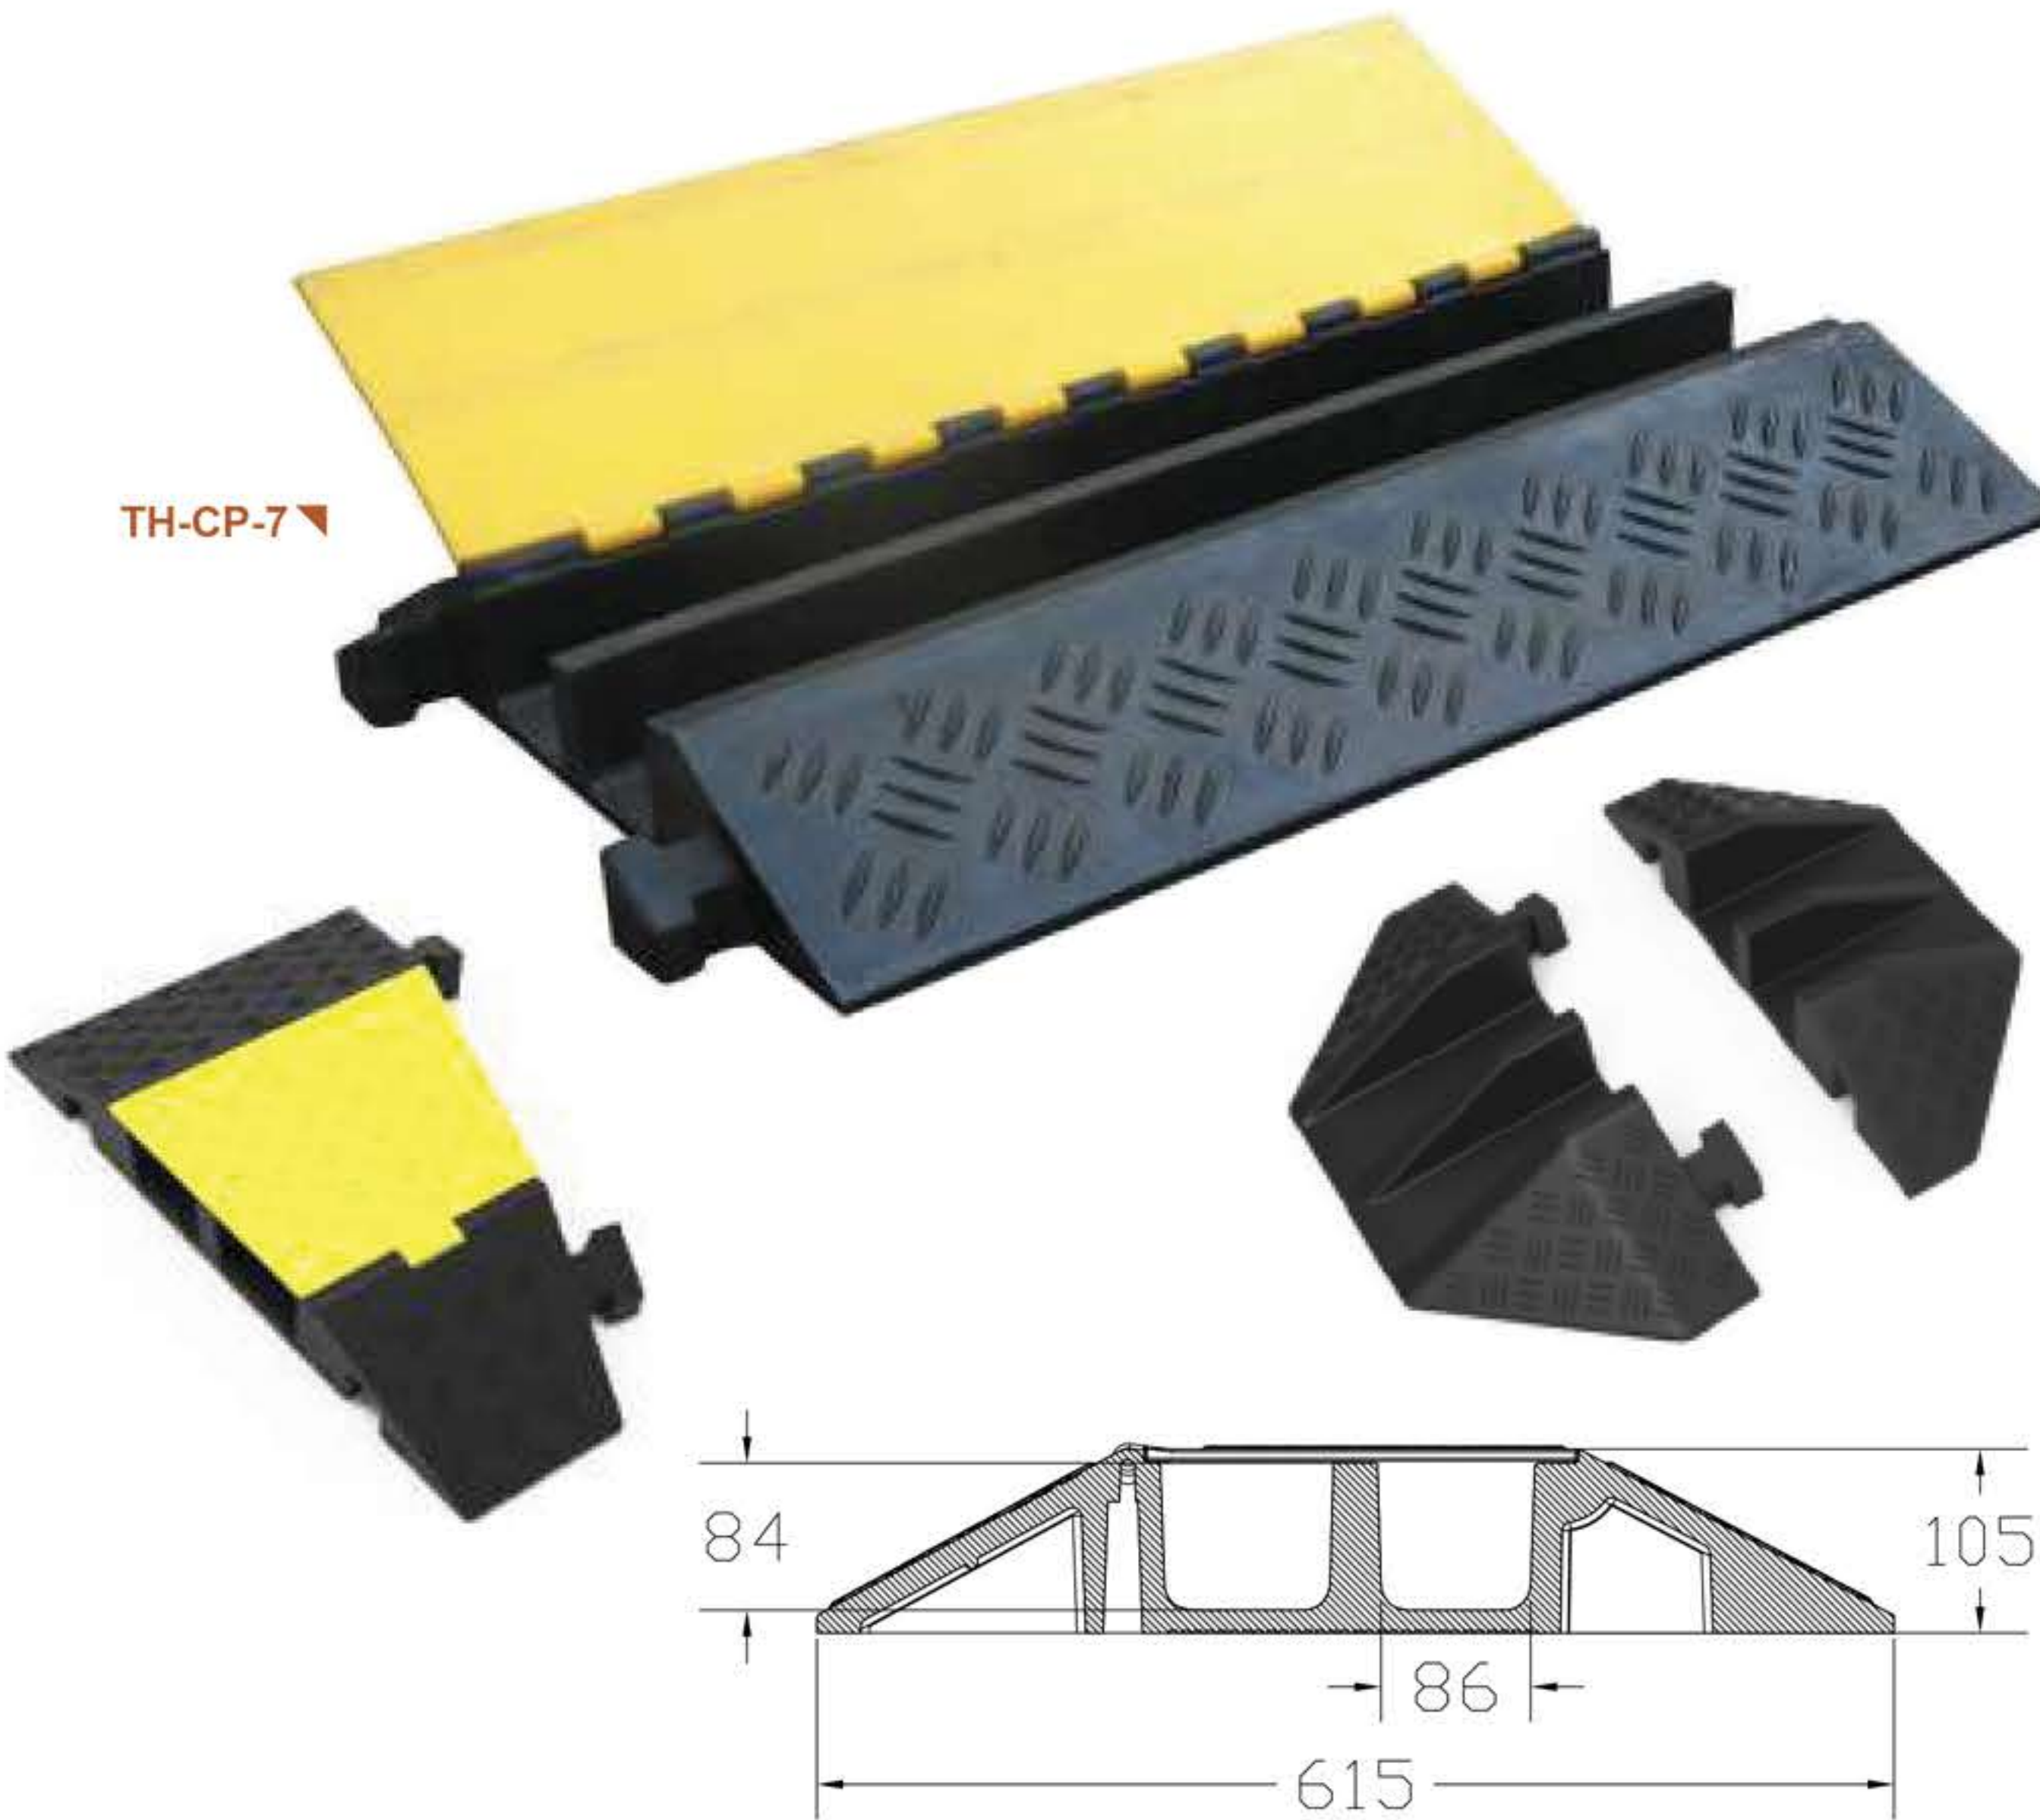

Model No	TH-CP-7	TH-CP-5M
Style	Hinged	Hinged
Material	Rubber Base & LDPE Lid	Rubber Base & LDPE Lid
Connection Style	Dog Bone	Dog Bone
Number of Channels	2	2
Components Color	Black Yellow	Black Yellow
Length	90.0cm	90.0cm
Width	61.5cm	27.3cm
Height	10.5cm	4.5cm
Channel Width	9.9cm	3.3cm
Channel Height	8.4cm	3.2cm
Load Capacity	16,000.0kg	12,000.0kg
Max. Cable Dia.	9.7cm	3.2cm



HEAVY-DUTY CABLE PROTECTOR

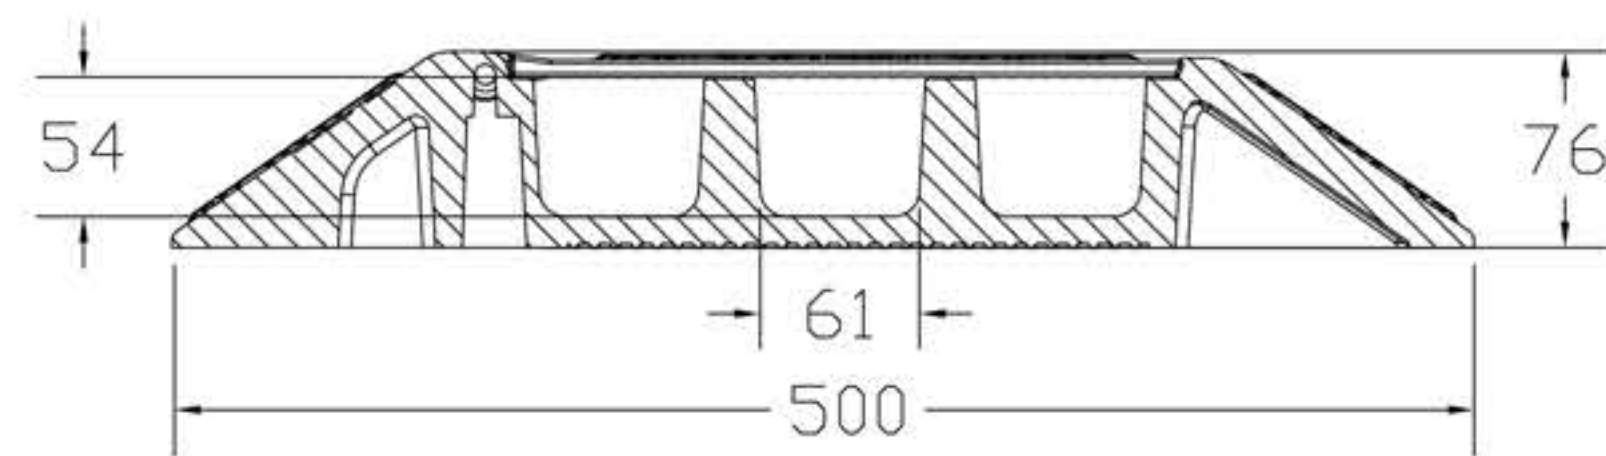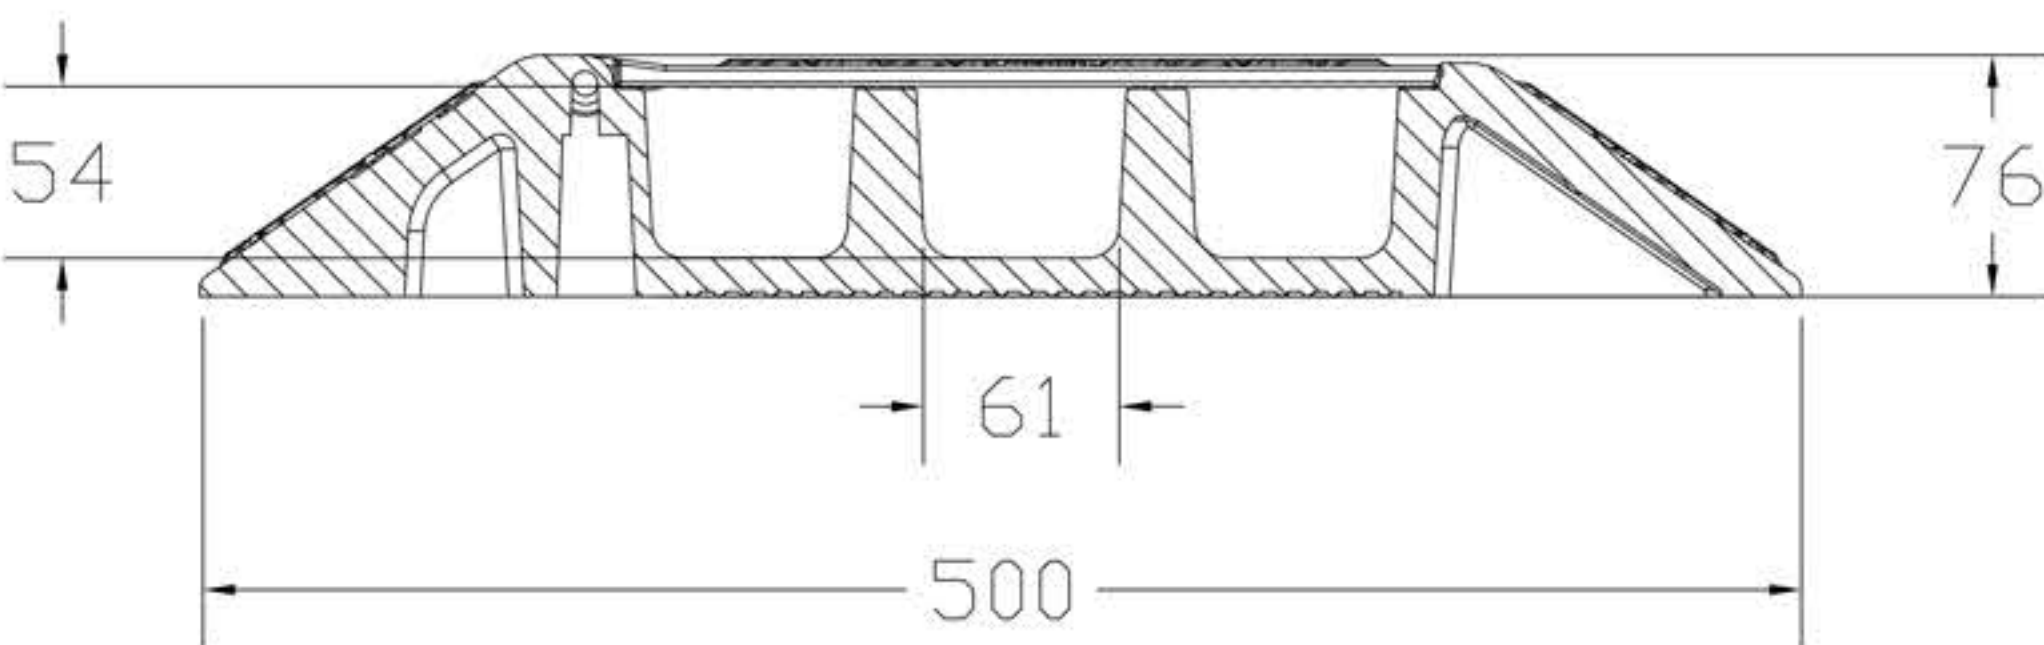

Model No	TH-CP-4M	TH-CP-2M
Style	Hinged	Hinged
Material	Rubber Base & LDPE Lid	Rubber Base & LDPE Lid
Connection Style	Dog Bone	Dog Bone
Number of Channels	3	5
Components Color	Black Yellow	Black Yellow
Length	90.0cm	90.0cm
Width	50.0cm	50.0cm
Height	7.5cm	5.5cm
Channel Width	6.5cm	4.0cm
Channel Height	5.5cm	4.2cm
Load Capacity	20,000.0kg	18,000.0kg
Max. Cable Dia.	5.5cm	4.0cm

LIGHT-DUTY CABLE PROTECTOR


This new series Rubber Cable Protector are design for Sound & Light Industry which only has Light Capacity Traffic. The Black Base is made of Recycle Tire Rubber and Yellow Lid is made of PVC. Now available in Small 2-Channel , Big 2-Channel, 3-Channel and 5-Channel.

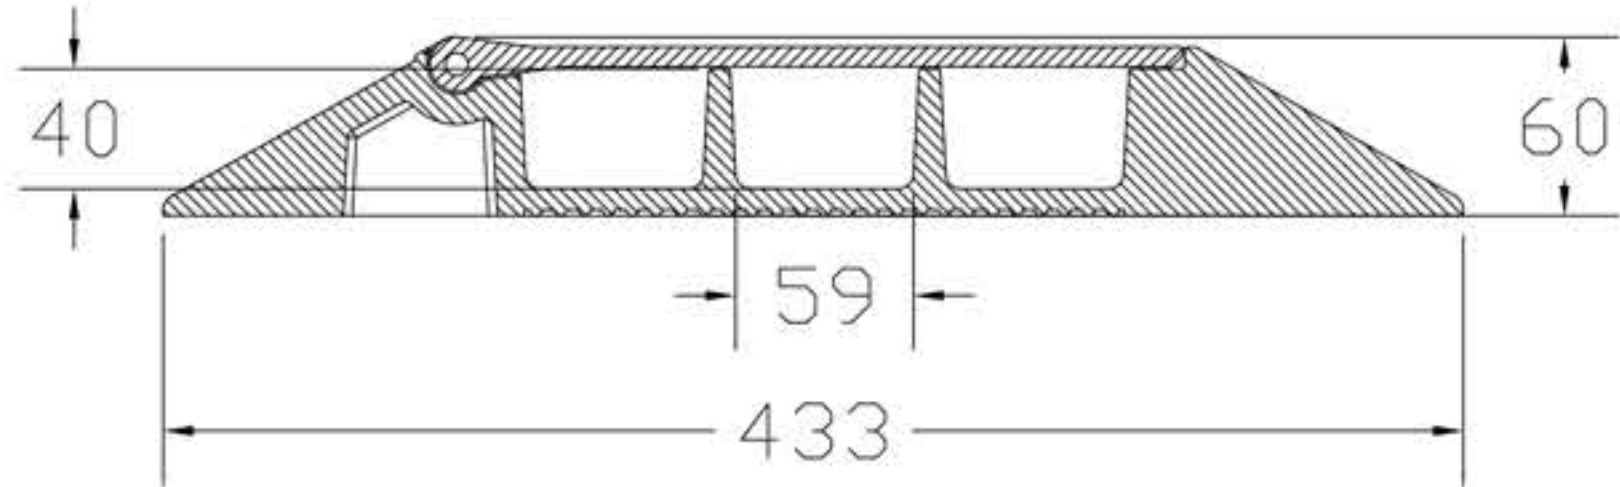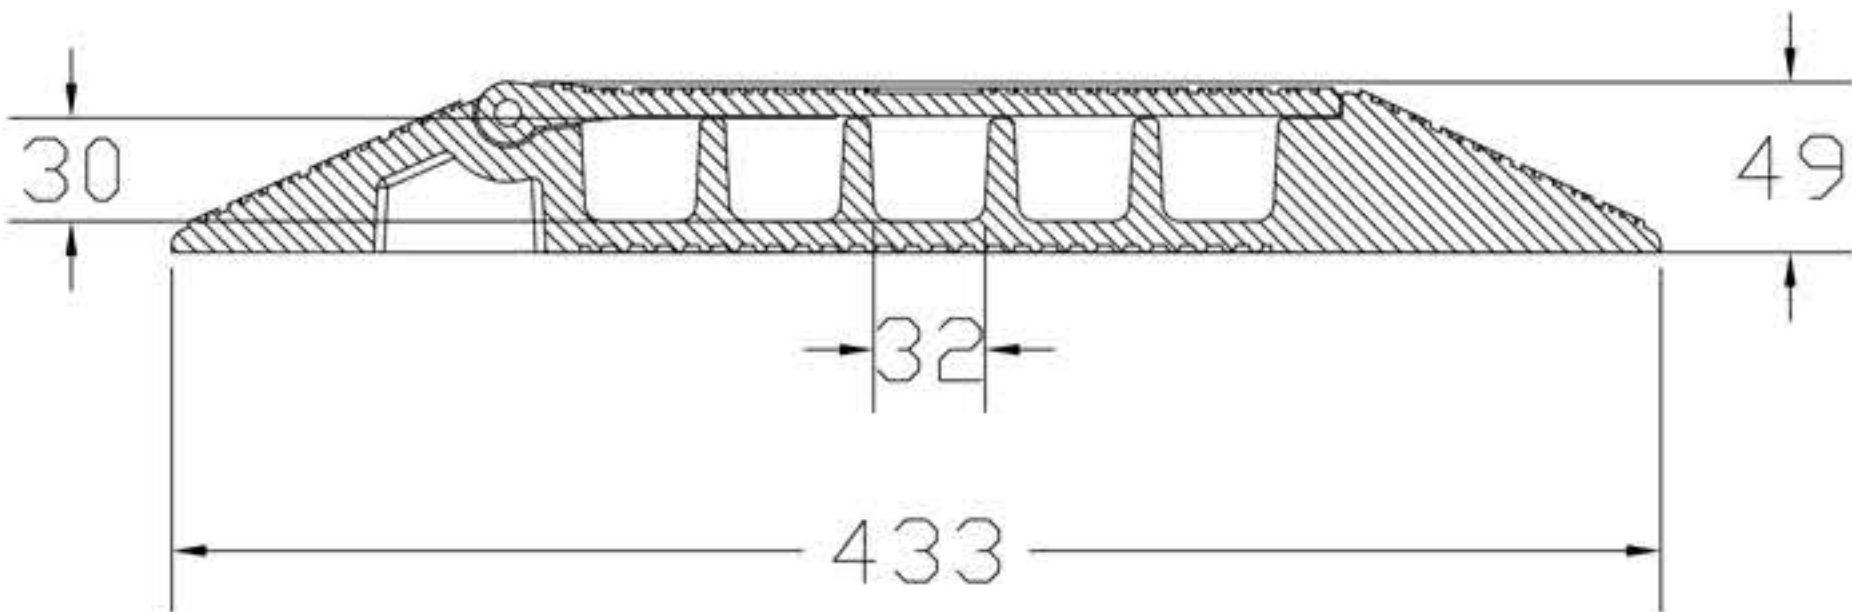


Model No	TH-ECP-2M	TH-ECP-4M
Length	90.0cm	90.0cm
Width	45.0cm	55.0cm
Height	5.0cm	7.5cm
Channel Width	3.2cm	5.0cm
Channel Height	3.2cm	4.0cm
Weight	10.0kg	12.0kg
Base Materials	Rubber	Rubber
Flap Materials	PE	PE
Loading Capacity	12 Ton Truck	12 Ton Truck

LIGHT-DUTY CABLE PROTECTOR

TH-ECP-5M ▼

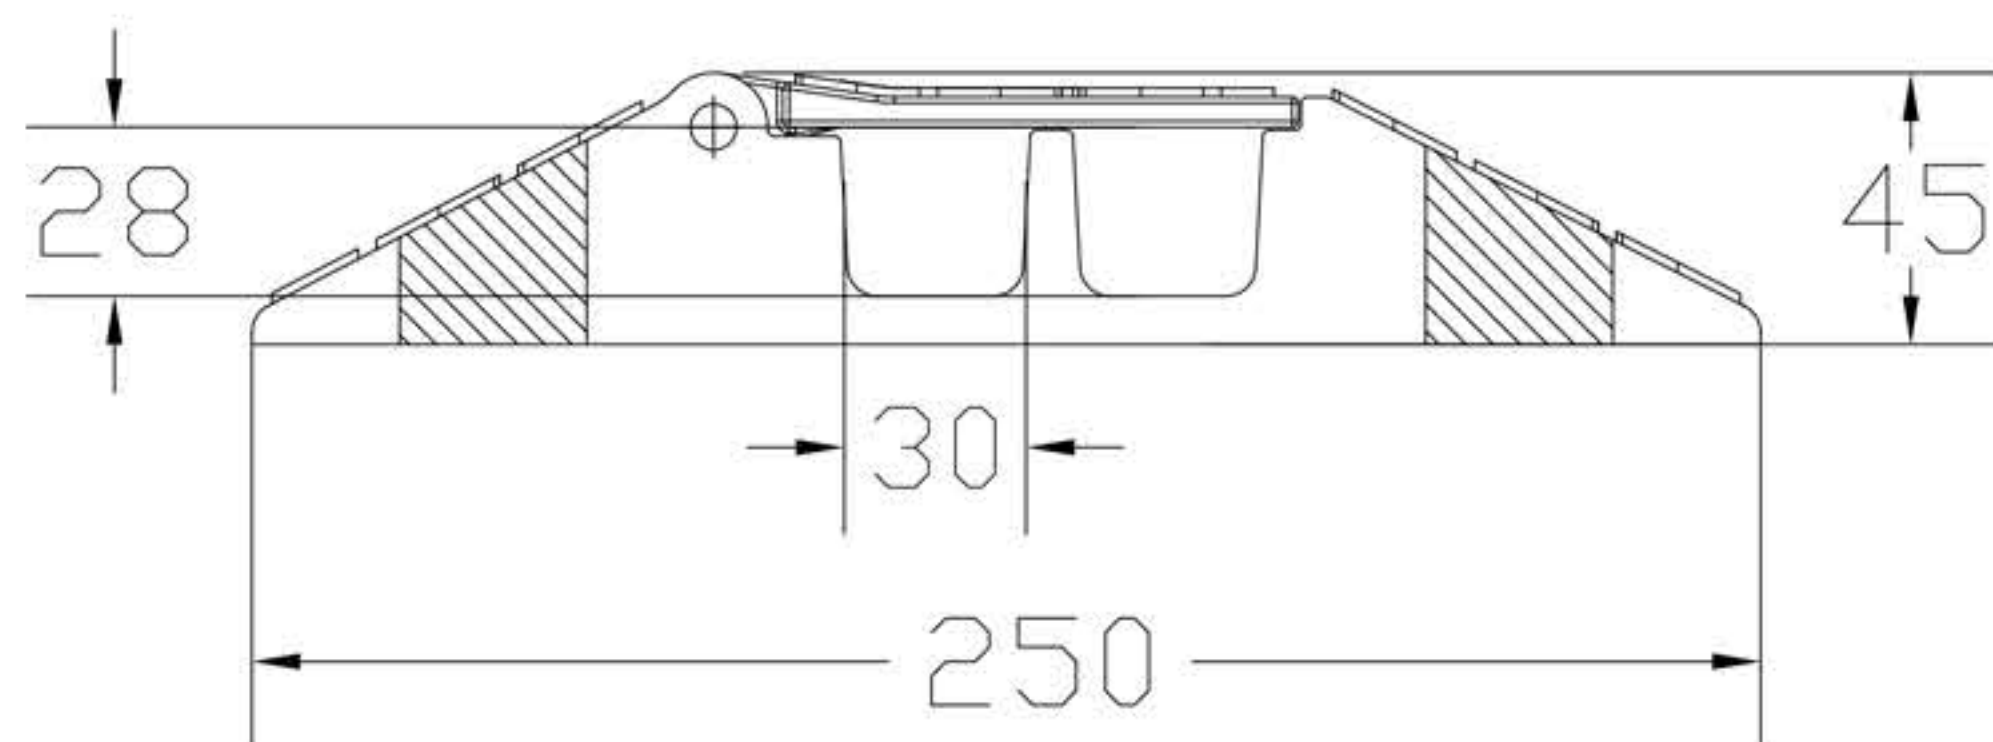


TH-ECP-7M ▼

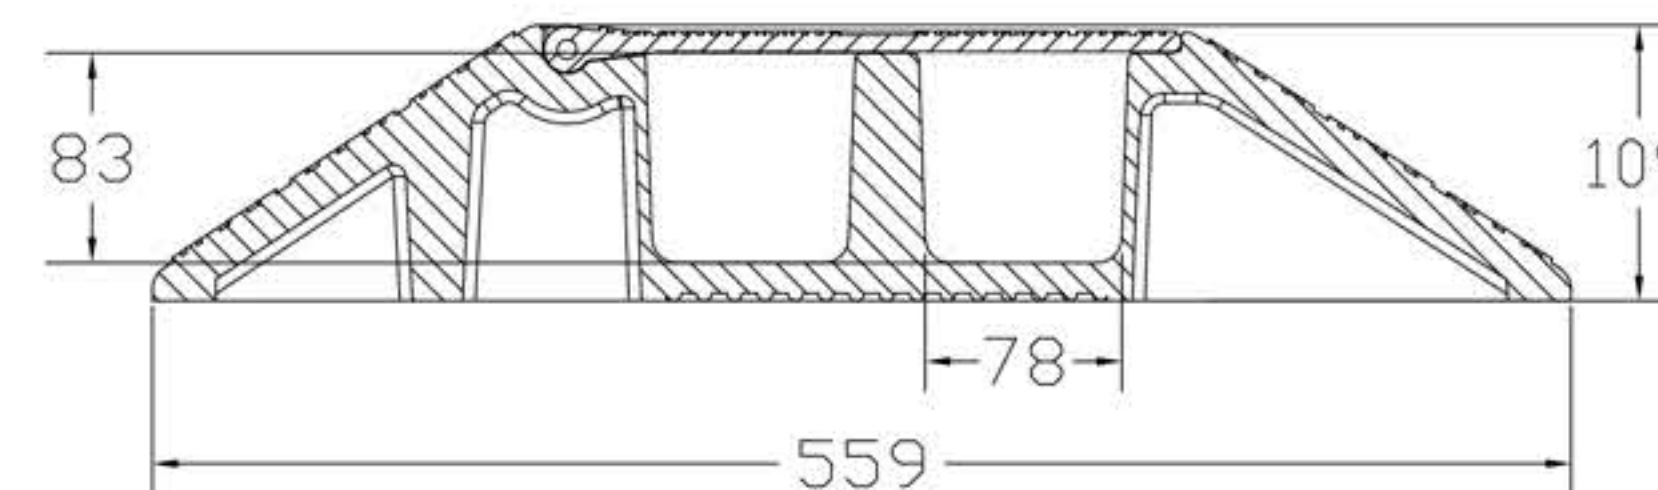

Model No	TH-ECP-5M	TH-ECP-7M
Length	90.0cm	90.0cm
Width	25.0cm	56.0cm
Height	4.5cm	10.0cm
Channel Width	3.0cm	8.0cm
Channel Height	2.5cm	8.0cm
Weight	6.0kg	25.0kg
Base Materials	Rubber	Rubber
Flap Materials	PE	PE
Loading Capacity	10 Ton Truck	12 Ton Truck

THRESHOLD RAMP

The Rubber Threshold Ramp provides a transition between elevated surfaces. Features a textured surface for traction and works great with wheelchairs, power chairs, scooters, and pedestrian traffic. Includes three channels to run wires, cables, and hoses beneath the ramp.

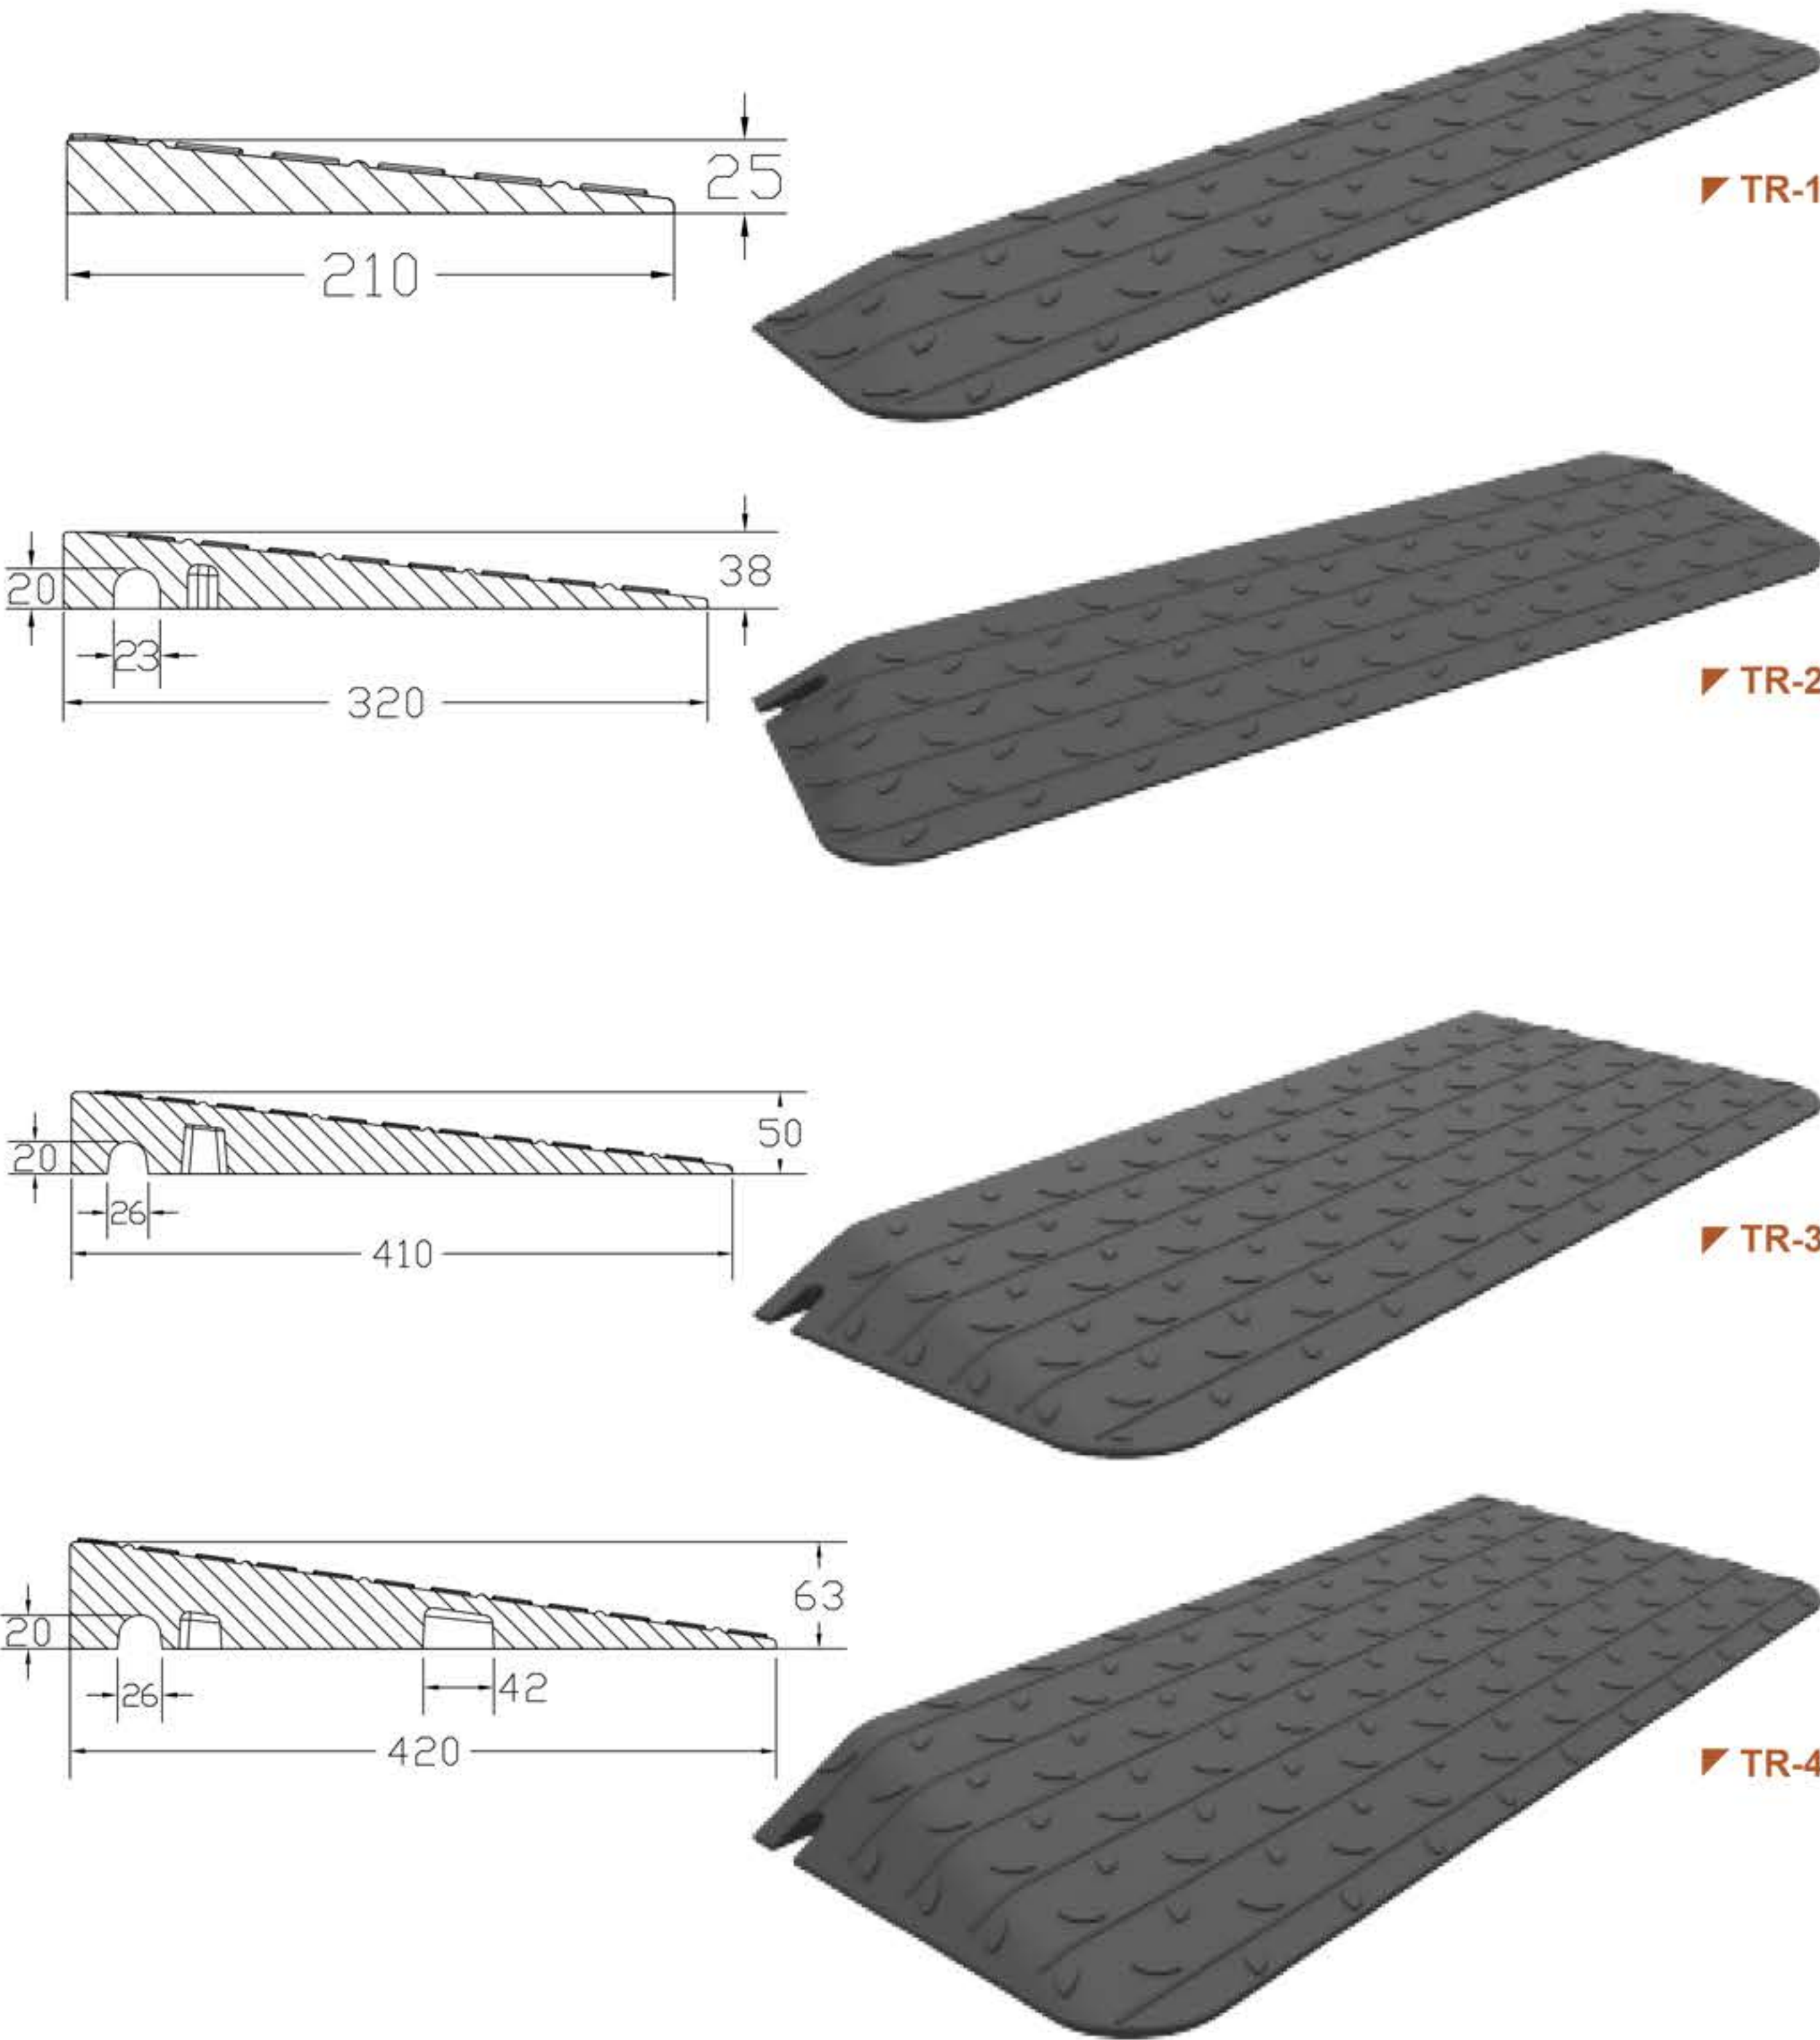

Model No	Length	Width	Height	Weight	Channel Width	Channel Height	Surface Type	Standards
TH-TR-1	110.0cm	21.0cm	2.5cm	5.0kg	No Channel	No Channel	Anti-Slip Pattern	Industry ADA Compliant
TH-TR-2	110.0cm	32.0cm	3.8cm	9.0kg	No Channel	No Channel		
TH-TR-3	110.0cm	41.0cm	5.0cm	14.0kg	3.0cm	3.0cm		
TH-TR-4	110.0cm	42.0cm	6.4cm	16.0kg	3.0cm	3.0cm		
TH-TR-5	90.0cm	46.0cm	7.6cm	17.0kg	3.0cm	3.0cm		
TH-TR-6	90.0cm	53.5cm	8.9cm	21.0kg	3.0cm	3.0cm		
TH-TR-7	90.0cm	61.0cm	10.2cm	26.5kg	3.0cm	3.0cm		

The theoretical data of the products shown in this book are for reference only, there are certain errors within the allowable range, please refer to the actual product.